2.0 mm | 12 mil & 5.0 mm | 20 mil

# GRANTSHIRE™

FLEXIBLE GLUE DOWN

PROSERIES™

LUXURY VINYL FLOORING

daltile



SuperGuardX™

REINFORCED SHIELD

2.0 mm | 12 mil & 5.0 mm | 20 mil

# GRANTSHIRE™

## FLEXIBLE GLUE DOWN

With breathtaking visuals, Grantshire takes inspiration from European marbles while offering the comfort and ease of luxury vinyl flooring. Available in four marble looks and two versatile rectangular sizes - the classic 12 x 24 or the larger 18 x 36. Grantshire offers premium features including a 2.0 mm thickness with 12 mil wear layer, perfect for residential and multifamily homes & a 5.0 mm thickness with 20 mil wear layer for commercial grade projects. Both offered with SuperGuardX™ Technology for lasting durability. Select beauty and function with Grantshire.

### TIMELESS LUXURY

- Four Marble Visuals
- Flexible Glue Down
- 12" x 24" & 18" x 36" sizes
- 2.0 mm Thickness with a 12 mil Wear Layer
- 5.0 mm Thickness with a 20 mil Wear Layer
- Micro Beveled

### PREMIUM FEATURES

- SuperGuardX™ Technology
- 100% Waterproof
- 100% Virgin Vinyl

IMAGINE WHAT'S POSSIBLE™ WITH DALTILE DESIGNS

Cover photo features Grantshire™ Tuscan Taupe, 18 x 36 on the floor.
Above photo features Grantshire™ Catania Calacatta, 12 x 24 on the floor.

2.0 mm | 12 mil & 5.0 mm | 20 mil

# GRANTSHIRE™

## FLEXIBLE GLUE DOWN

SIZES:

18 x 36 Floor Tile

12 x 24 Floor Tile

12 x 24 & 18 x 36 MARBLE LOOKS - NINE PIECES SHOWN



CATANIA CALACATTA GR41



SOLARA WHITE GR42



TUSCAN TAUPE GR43



GENOA GRIGIO GR44

2.0 mm | 12 mil & 5.0 mm | 20 mil

# GRANTSHIRE™

## FLEXIBLE GLUE DOWN

NOISE **REDUCING** | **EASY** TO CLEAN | **100%** WATERPROOF | **100%** VIRGIN VINYL


| SPECIFICATIONS | 2.0 mm \| 12 mil | 5.0 mm \| 20 mil |
|---|---|---|
| Product Type: | LVF Dry Back | LVF Dry Back |
| Installation: | Glue Down | Glue Down |
| Thickness: | 2.0 mm | 5.0 mm |
| Wear Layer: | 12 mil (0.3048 mm) | 20 mil (0.508mm) |
| Finish: | SuperGuard X™ Technology | SuperGuard X™ Technology |
| Size: | 12" W x 24" L & 18" W x 36" L | 12" W x 24" L & 18" W x 36" L |
| Underlayment: | N/A | N/A |
| Bevel: | Micro Bevel | Micro Bevel |
| Embossing: | Embossed | Embossed |
| Variation: | 12" x 24" - 90 sf repeat - 36 Unique Pieces<br>18" x 36" - 81 sf repeat - 12 Unique Pieces | 12" x 24" - 90 sf repeat - 36 Unique Pieces<br>18" x 36" - 81 sf repeat - 12 Unique Pieces |
| Sq. Ft./Carton: | 60.00 / 67.50 | 24.00 / 27.00 |
| Pieces/Carton: | 30 & 15 | 12 & 6 |
| Weight | 1.59 lbs per pc/ 3.57 lbs per pc<br>47.55 lbs per carton/53.49 lbs per carton | 3.93 lbs per pc/ 8.85 lbs per pc<br>47.10 lbs per carton/53.10 lbs per carton |
| Warranty: | **12 mil:**<br>Limited 25 Year Residential Warranty<br>Limited 10 Year Multifamily Warranty<br>Limited 7 Year Light Commercial Warranty | **20 mil:**<br>Limited Lifetime Residential Warranty<br>Limited 15 Multifamily Warranty<br>Limited 15 Year Light Commercial Warranty<br>Limited 15 Year Commercial Warranty |

| | |
|---|---|
| Installation Advisory: | Glue Down LVF must be installed using ProSeries™ Adhesive by Daltile. See daltile.com/LVF for more information. |
| Stocking Platform: | 2.0 mm \| 12 mil, 5.0 mm \| 20 mil |
| Special Order Platform: | Additional platforms available on special order. Minimum order quantities apply. Contact your Daltile representative for additional information. |
| Transitions: | Slim Trim 4-in-1 Transition, Extra Tall Stair Nose, Full Round Stair Tread, Round Stair Nose, Quarter Round, and Slim Cap. |

## PERFORMANCE & CHARACTERISTICS

| | |
|---|---|
| Construction: | Commercial Grade Luxury Vinyl Flooring; 100% Virgin Vinyl |
| Classification: | ASTM F1700 - Class III, Type B Embossed |
| Squareness: | ASTM F2421 - Passes - ± 0.010" max |
| Size and Tolerance: | ASTM F2421 - Passes - Plank Length > ± 0.060 in. |
| Thickness: | ASTM 386/387 - Passes - ± 0.005 inches (2 mm) / ± 0.008 inches (5 mm) from specified thickness (0.079 in.) |
| Flexibility: | ASTM F137 - Passes - 1" mandrel, no crack or break |
| Dimensional Stability: | ASTM F2199 - Passes - Residential & Commercial - Res 0.25% / lin ft. (0.080 in) avg max. Comm 0.20% / lin ft. (0.080 in) avg max |
| Static Load Limit: | ASTM F970 - Passes - Average ≤ 0.005 inches |
| Residual Indentation: | ASTM F1914 - Passes - Average < 8.0% Max ≤ 10% |
| Resistance To Chemicals: | ASTM F925 - Passes - No more than a slight change |
| Resistance To Light: | ASTM F1515 - Passes - ΔE < 8.0 |
| Resistance To Heat: | ASTM F1514 - Passes - Average ΔE < 8.0 |
| Critical Radiant Flux: | ASTM E648 - Passes - Class 1 (> 0.45w/cm2) |
| Smoke Density: | ASTM E662 - Part A - Passes - <450 |

## INSTALLATION OPTIONS



STRAIGHT JOINT | 33% BRICK JOINT

## NOTES

See daltile.com/LVF for recommended installation and care guidelines.

Please note that shade variations may occur in the same colors of Grantshire™ between the different product platforms: including rigid click and flexible glue down, as well as between the different wear layers: 12 mil and 20 mil. These variations are a natural result of the manufacturing process and do not affect the quality or performance of the product. Color selections need to be made with samples of the exact platform and wear layer.

floor score — CERTIFIED BY SCS Global Services

CERTIFIED INDOOR AIR QUALITY™ SCS GLOBAL SERVICES

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at **daltile.com/LVF**

PROSERIES™ LUXURY VINYL FLOORING

daltile

©2026 Dal-Tile Distribution, LLC (8/26)


# FLEXIBLE GLUE DOWN
ACCESSORIES

PERFORMANCE ACCESSORIES

Six trims and moldings that are designed to coordinate with each of our existing colors within the collection.

| | | | |
|---|---|---|---|
| **VRDSN:** | Round Stair Nose (1-3/4" x 94") | **EXTSN:** | Extra Tall Stair Nose (2" x 94") |
| **VQRND:** | Quarter Round (3/4" x 94") | **RNDSTRD:** | Full Round Stair Tread (12-1/5" x 50") |
| **VSLCAP:** | Slim Cap, Low Profile End Cap (1-3/8" x 94") | **SLIMT:** | Slim Trim 4-in-1 Transition (2" x 94"), Four unique trims and moldings in one single SKU (T-Molding, Hard Surface Reducer, Carpet Transition, End Cap) |


## STOCKING ITEMS

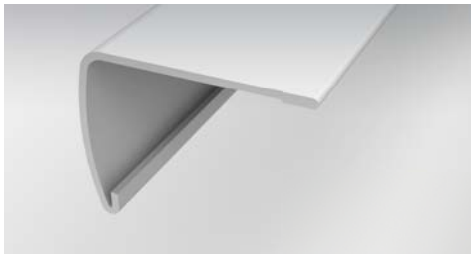

### Extra Tall Stair Nose
Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*




### Slim Trim 4-in-1 Transition
Performance Accessories' exclusive 4-in-1 transition allows you to utilize a single transition for four different applications.

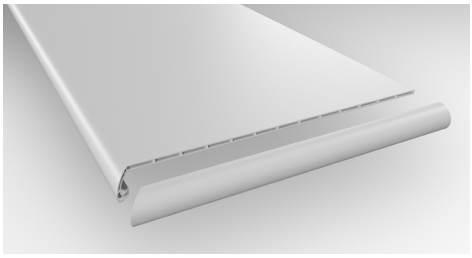

### Full Round Stair Tread
A vinyl stair tread with pre-attached stair nosing. Can be used on steps with or without nosing.

## EACH OF THE BELOW ARE ACHIEVED VIA THE SLIM TRIM 4-IN-1 TRANSITION (SHOWN ABOVE)



### T-Molding
Used to transition between flooring of equal heights and in doorways.




### Hard Surface Reducer
Connects two floors of different heights.



### End Molding
Finishing up to a threshold, sliding door, etc.



### Carpet Transition
Provides a smooth transition between your hard surface floor & carpet. A carpet tap down trim must be used & is sold at your local hardware store.

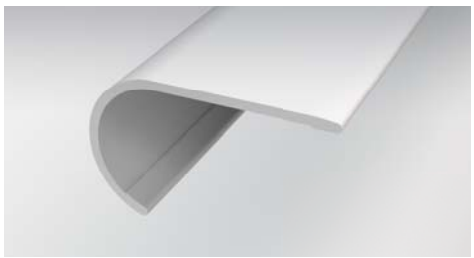

### Round Stair Nose
Creates a transition to the edge of the step by overlapping the flooring on the back end. Can also be installed flush on floors with an overall thickness up to 4 mm.*



### Quarter Round
Conceals the expansion space between the wall and the flooring.



### Slim Cap
Low profile end cap used to transition from flooring to carpet, masonry, sliding doors, and other exterior door jambs.

floor score
CERTIFIED BY SCS Global Services

CERTIFIED INDOOR AIR QUALITY SCS GLOBAL SERVICES

*References to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.

PROSERIES™
LUXURY VINYL FLOORING
daltile

©2026 Dal-Tile Distribution, LLC (8/26)