CLASSENTINO MARBLE™

COLORBODY™ PORCELAIN FLOOR AND MOSAIC TILE

MARAZZI®

MARBLE LOOK



CLASSENTINO MARBLE™

Elegant yet trending, Classentino Marble™ captures the bold, realistic beauty of natural marble in the durability of porcelain tile. Its veining and soft, sophisticated tones bring the luxury of stone to any space. Available in the popular 24x48, 24x24, and 12x24 floor tile sizes for versatile installation across kitchens, bathrooms, and living areas. Or expand your horizons with the 2x3 Linear Hex mosaic, perfect for adding texture and visual interest to accent walls, backsplashes, and shower floors.



Cover photo features Palazzo White, 12 x 24 on the floor and wall and Coliseum Gray, 2 x 3 Linear Hexagon Mosaic on the shower floor.
Above photo features 12 x 24 on the shower wall and Centurio Black, 2 x 3 Linear Hexagon Mosaic on the back wall.

CLASSENTINO MARBLE™

COLORBODY™ PORCELAIN FLOOR AND MOSAIC TILE

MARAZZI

FINISHES: MATTE I POLISHED

USAGE: FLOOR, WALL, COUNTERTOP, SHOWER FLOOR, EXTERIOR FLOOR

MATERIAL: PC COLORBODY PORCELAIN

PRICING: LOW – HIGH

SPECIAL FEATURES: STEPWISE™, TRUEDGE™, REVEAL SYNC3D™, MADE IN THE U.S.A., LARGE FORMAT, MOSAIC/DECO, ENCAUSTIC, TERRAZZO, PAVER, CUSTOMIZE

MARBLE LOOK

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.


COLORBODY™ PORCELAIN FLOOR TILE



CT30 Palazzo White



CT32 Coliseum Gray

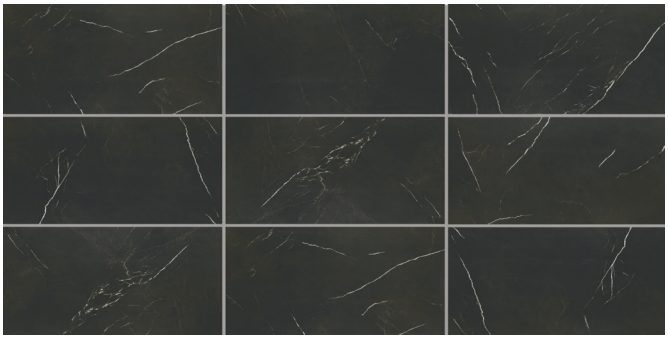


CT34 Centurio Black


COLORBODY™ PORCELAIN 2 X 3 LINEAR HEX MOSAIC TILE



CT30 Palazzo White



CT32 Coliseum Gray



CT34 Centurio Black

SLIP RESISTANT, WATERPROOF, STAINPROOF, DENTPROOF, SCRATCH-RESISTANT*, FIRE-RESISTANT*, CLIMATEPRO™, SIMPLICLEAN™

VISIT MARAZZIUSA.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

CLASSENTINO MARBLE™

COLORBODY™ PORCELAIN FLOOR AND MOSAIC TILE

FINISHES: MATTE | POLISHED

USAGE: FLOOR, WALL, COUNTERTOP, SHOWER FLOOR, EXTERIOR FLOOR

MATERIAL: PC COLORBODY PORCELAIN

PRICING: LOW – HIGH

SPECIAL FEATURES: STEPWISE™, TRUEDGE™, REVEAL SYNC3D™, MADE IN THE U.S.A., LARGE FORMAT, MOSAIC/DECO, ENCAUSTIC, TERRAZZO, PAVER, CUSTOMIZE

MARBLE LOOK

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

SIZES

			Thickness	Finish	Made in U.S.A.
	24 x 48 Floor Tile	23-7/16" x 47-1/16" (59.50 cm x 119.50 cm)	3/8"	M P	
	24 x 24 Floor Tile*	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	3/8"	M P	
	12 x 24 Floor Tile	11-11/16" x 23-7/16" (29.65 x 59.50 cm)	3/8"	M P	
	2 x 3 Linear Hex Mosaic (Mesh-Mounted)	12-1/8" x 12-3/16" Sheet (30.81 cm x 30.94 cm Sheet)	3/8"	M	

Made in the U.S.A. designation is subject to change. Please visit marazziusa.com for the most current manufacturing information.

M Matte Finish P Polished Finish (Available in CT30 only)

TRIM

Description	Number	Size	Shape	Finish
Floor Bullnose	P43F9	3 x 24		M

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position. Cove base and cove corner trim are suitable for non-freezing climates only.

M Matte Finish

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	■
Wet & Level – Interior Floor	≥ 0.42	■**
Shower Floors – Standard Center Drain	≥ 0.42	■*
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	■*
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	■
Pool Linings	N/A	■*

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazziusa.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

* Mosaic tile only. ** Matte floor and mosaic tile only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor Tile: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and/or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlapshould not exceed 33%.) Mosaic Tile: 1/8"	V4 Random Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	Matte Finish Result	Polished Finished Result
Water Absorption	C373	< 0.5%	< 0.5%
Breaking Strength	C648	≥ 275 lbs	≥ 275 lbs
Scratch Hardness	C1895	8.0	6.0
Chemical Resistance	C650	Resistant	Resistant

For additional information on test results, visit us at: marazziusa.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial*
2	All Residential Areas	4	All Residential / Commercial**

* Polished Finsh ** Matte Finish

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: marazziusa.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to marazziusa.com/LargeTiles for more information.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values <0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at www.tileusa.com.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

FEATURES

PRE-CONSUMER RECYCLED MATERIALS

REVEAL IMAGING®

CERTIFIED PORCELAIN TILE

ZEROTOX

All or select items within this series meet the requirements for these qualifications. For more information visit marazziusa.com.

© 2026 Marazzi (09/26)