COTTO REVIVAL™

GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC WALL & MOSAIC TILE

MARAZZI®

COTTO LOOK



COTTO REVIVAL™

A celebration of Spanish elegance, Cotto Revival™ pays homage to the historic artistry of handmade Talavera tile. A collection full of cotto inspiration in warm and cool tones are available in a glazed porcelain 8 x 8 and 8" hexagon as well as the linear 2 x 9 tile. Three 4 x 4 decorative wall tiles are offered in an array of patterns, colors, and geometric designs – perfectly crafted for statement walls and backsplashes. Add a finishing touch with the glossy, crackle finish 1 x 6 mosaic, available in rich jewel tones for a complete cultural experience.





DARE TO BE BOLD

WITH MARAZZI DESIGNS

Cover photo features Rust, 8 x 8 on the floor, Alpaca, 2 x 9 on the wall, and Marbella, 4 x 4 on the stair face.
Above photo features Lagos, 4 x 4 on the wall, and Ash 8" Hexagon on the floor.

COTTO REVIVAL™

GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC WALL & MOSAIC TILE

MARAZZI

FINISHES: MATTE | GLOSSY

USAGE: FLOOR, WALL, COUNTERTOP, SHOWER FLOOR, EXTERIOR FLOOR

MATERIAL: PG GLAZED PORCELAIN, CG GLAZED CERAMIC


PRICING: LOW – HIGH

SPECIAL FEATURES: STEPWISE™, TRUEDGE™, REVEAL SYNC3D™, MADE IN THE U.S.A., LARGE FORMAT, MOSAIC/DECO, ENCAUSTIC, TERRAZZO, PAVER, CUSTOMIZE

COTTO LOOK

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

4 x 4 DECO WALL TILE

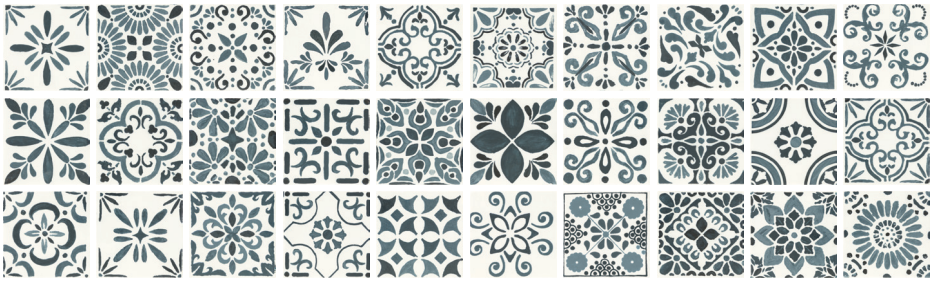

CV58 Lagos*




CV59 Marbella*



CV60 Valencia*


*Available in 30 unique designs, which are pre-boxed in a random assortment. Individual designs are not sold separately

8" HEXAGON FLOOR TILE

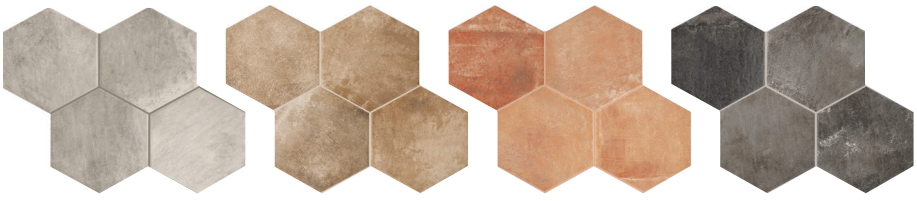

CV50 Ash | **CV51** Alpaca | **CV52** Rust | **CV53** Baltic


1 x 6 MOSAIC TILE




CV54 Bay Crackle



CV55 Pollen Crackle



CV56 Clover Crackle



CV57 Spice Crackle

8 x 8 FLOOR TILE



CV50 Ash



CV51 Alpaca



CV52 Rust



CV53 Baltic

2 x 9 FLOOR TILE



CV50 Ash



CV51 Alpaca



CV52 Rust



CV53 Baltic

SLIP RESISTANT | WATERPROOF | STAINPROOF | DENTPROOF | SCRATCH-RESISTANT | FIRE-RESISTANT | CLIMATEPRO™ | SIMPLICLEAN™

VISIT MARAZZIUSA.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

COTTO REVIVAL™

GLAZED PORCELAIN FLOOR TILE AND GLAZED CERAMIC WALL & MOSAIC TILE

MARAZZI

FINISHES: MATTE I GLOSSY

USAGE: FLOOR, WALL, COUNTERTOP, SHOWER FLOOR, EXTERIOR FLOOR

MATERIAL: PG GLAZED PORCELAIN, CG GLAZED CERAMIC

PRICING: LOW – HIGH

SPECIAL FEATURES: STEPWISE™, TRUEDGE™, REVEAL SYNC3D™, MADE IN THE U.S.A., LARGE FORMAT, MOSAIC/DECO, ENCAUSTIC, TERRAZZO, PAVER, CUSTOMIZE

COTTO LOOK

SIZES

			Thickness	Finish	Made in U.S.A.
	8 x 8 Floor Tile	7-15/16" x 7-15/16" (20.26 cm x 20.26 cm)	5/16"	M	
	8" Hexagon Floor Tile	7-7/8" x 9-1/16" (19.95 cm x 23.04 cm)	5/16"	M	
	2 x 9 Floor Tile	2-3/8" x 9-11/16" (6.00 cm x 24.60 cm)	1/4"	M	✓
	4 x 4 Deco Wall Tile	3-7/8" x 3-7/8" (9.85 cm x 9.85 cm)	3/8"	G	✓
	1 x 6 Mosaic (Mesh-mounted)	11-1/2" x 11-9/16" Sheet (29.20 cm x 29.50 cm Sheet)	5/16"	G	

Made in the U.S.A. designation is subject to change. Please visit marazziusa.com for the most current manufacturing information.

M Matte Finish G Glossy Finish

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	■*
Wet & Level – Interior Floor	≥ 0.42	■*
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	■
Countertops	N/A	■*
Pool Linings	N/A	■**

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit marazziusa.com/DCOF.

APPLICATION NOTES:

Floor tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

Wall tile suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

Mosaic tile suitable for interior applications only.

* Floor tile only.

** 2 x 9 Floor tile and 4 x 4 Wall Deco tile only.

FEATURES

PRE-CONSUMER RECYCLED MATERIALS

POST-CONSUMER RECYCLED MATERIALS

REVEAL IMAGING®

CERTIFIED PORCELAIN TILE

ZEROTOX

All or select items within this series meet the requirements for these qualifications. For more information visit marazziusa.com.

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor Tile: 3/16" Wall & Mosaic Tile : 1/8"	V3 High Variation (Mosaic) V4 Random Variation

PERFORMANCE CHARACTERISTICS

	ASTM#	Floor Results	Wall Results	Mosaic Results
Water Absorption	C373	< 0.5%	< 20.0%	< 20.0%
Breaking Strength	C648	> 275 lbf	≥ 125 lbf	≥ 125 lbf
Scratch Hardness	C1895	8.0	≥ 4.0	4.0 - 6.0
Chemical Resistance	C650	Resistant	Resistant	N/A*

For additional information on test results, visit us at: marazziusa.com/information/TestResults.

* See 1 x 6 Mosaics in NOTES.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	(3)	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: marazziusa.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Use of a latex modified thin-set is recommended for installation. For more information, visit marazziusa.com.

* For 1 x 6 mosaics.

Crackle tiles must be sealed with a penetrating sealer prior to grouting to prevent the grout from staining the mosaic. For best results, use a grout color to match the tile.

Wall installation only, where tile will not come into contact with staining agents including food.

Not recommended for wet areas, countertops or floors.

Periodic resealing of crackle tile is required.

© 2026 Marazzi (07/26)